



**HAHN - Elektrobau GmbH & Co.
KG**

Bellersheimerstraße 45
35410 Hungen
Germany

phone: +49 (0) 6402/808-0

fax: +49 (0) 6402/808-60

email: info@hahn-trafo.de

Data sheet: BV EI 305 2057

Size 5 a: height 29.8 mm	3,0 VA	ta 40/F	BV EI 305 ...
--------------------------	--------	---------	---------------

Several hundreds of typen provide high electrical safety and long service-life for printed circuit boards, household appliances, leisure electronics, heating and control technology as well as in assembly techniques. Transformers for special requirements with lower open-circuit (no-load) loss capacity are also available in the range.

absolutely short-circuit-proof

minimal size

test certifications to ENEC 10-, VDE, UL- and CSA-regulations

vaccum encapsulated, bobbin with dual chamber windings

temperature class ta 40°C/F and ta 70°C/F

hight electrical safety and long service-life properties


individually tested with certificate

excellent temperature fluctuation resistance properties


self-extinguishing cast housing and sealing material




Article no. BV	Output ta 40°C/F	prim.V	Connecting pins	Operating point sec. $\pm 5\%$	Connecting pins	No-load voltage V $\pm 5\%$
BV EI 305 2057	3,0	230	1-5	2x12 V 125 mA	6-7/9-10	20,9/20,9

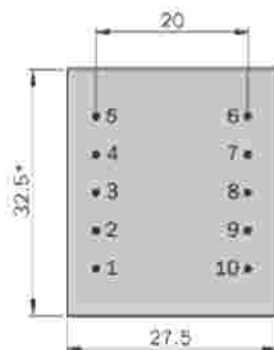

Ansicht auf die Seite

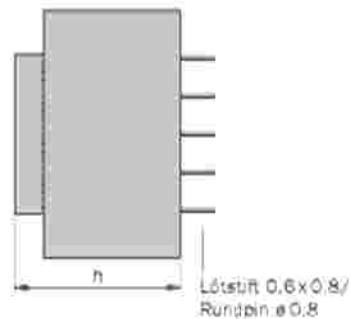

Lötstift 0,6x0,8/
Rundpin $\varnothing 0,8$



Maße ohne Toleranzangabe $\pm 0,3$ mm
Ausführungsänderungen vorbehalten

Dimensions with no indication of tolerances $\pm 0,3$ mm.