



**HAHN - Elektrobau GmbH & Co.
KG**

Bellersheimerstraße 45
35410 Hungen
Germany

phone: +49 (0) 6402/808-0

fax: +49 (0) 6402/808-60

email: info@hahn-trafo.de




Data sheet: BV EI 305 2059

Size 5 a: height 29.8 mm	3,0 VA	ta 40/F	BV EI 305 ...
--------------------------	--------	---------	---------------

Several hundreds of typen provide high electrical safety and long service-life for printed circuit boards, household appliances, leisure electronics, heating and control technology as well as in assembly techniques. Transformers for special requirements with lower open-circuit (no-load) loss capacity are also available in the range.

absolutely short-circuit-proof	
minimal size	
test certifications to ENEC 10-, VDE, UL- and CSA-regulations	
vaccum encapsulated, bobbin with dual chamber windings	
temperature class ta 40°C/F and ta 70°C/F	
hight electrical safety and long service-life properties	
individually tested with certificate	
excellent temperature fluctuation resistance properties	
self-extinguishing cast housing and sealing material	

Article no. BV	Output ta 40°C/F	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV EI 305 2059	3,0	230	1-5	2x18 V 83 mA	6-7/9-10	30,7/30,7

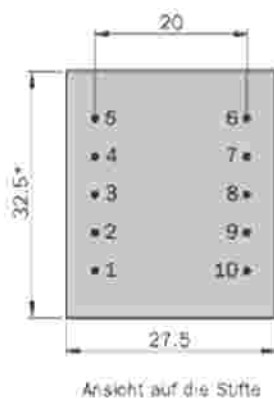

Maße ohne Toleranzangabe ± 0,3 mm
Ausführungsänderungen vorbehalten

Dimensions with no indication of tolerances ± 0,3mm.