

PRIMARY VOLTAGE						
Secondary protection mA	Reference	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature °C	Rating VA
630	44193	6	533	8	T 70 B	3,2
400	44194	9	356	12	T 70 B	3,2
315	44195	12	267	16	T 70 B	3,2
250	44196	15	213	20	T 70 B	3,2
200	44197	18	178	24,1	T 70 B	3,2
160	44198	24	133	32,1	T 70 B	3,2
315	44199	2 x 6	2 x 267	2 x 8	T 70 B	3,2
200	44200	2 x 9	2 x 178	2 x 12	T 70 B	3,2
160	44201	2 x 12	2 x 133	2 x 16	T 70 B	3,2
125	44202	2 x 15	2 x 107	2 x 20	T 70 B	3,2
100	44203	2 x 18	2 x 89	2 x 24	T 70 B	3,2
80	44204*	2 x 24	2 x 67	2 x 32,1	T 70 B	3,2


* **to be noted** : 2 x 24 V non safety transformer approved,
conform to EN 61558-2-6 (Isolating transformer).

- Vacuum filling
- Two compartments bobbins
- Self-extinguishing plastics UL 94 VO
- Degree of protection IP 00
- 150 grams weight
- Resin class B CEI 85 (20 000 h testing to CEI 126)
- Fuse protection on secondary side (see table above) to be assumed by customer
- 30 V and 36 V models are VDE EN 61558-2-6 certified (production on request)
- Insulation voltage 4 KV (6 KV MYRRA test)
- 100% tested production
- Certification : CCA procedure on request

OPTIONS :


Boxes with fixing support

2 Secondary windings
6 7 9 10




Primary winding



1 Secondary winding
6 7 9 10



Primary winding



Recommended layout for transformers
with 1 secondary winding
(Allows the use of a transformer with
2 secondary winding)

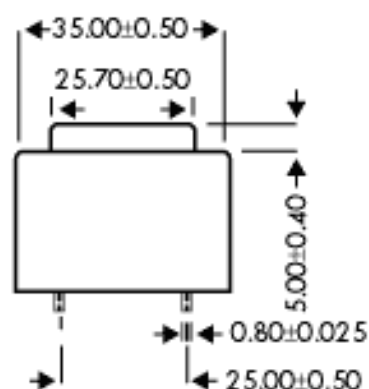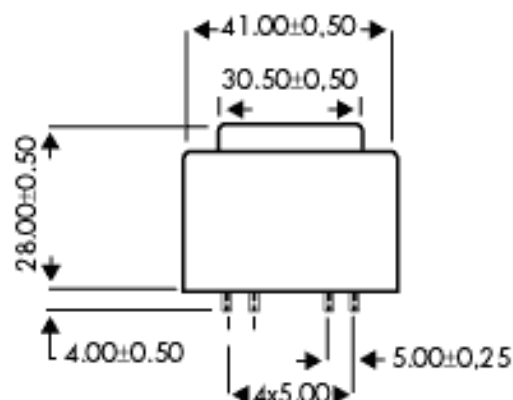

** RECOMMENDED DRILL-HOLE DIAMETER FOR 1,3 mm PINS