

PRIMARY VOLTAGE						
Primary protection mA	Reference	Secondary voltage V	Secondary Current mA	No-load voltage V	Ambient Temperature °C	Rating VA
63	44265	6	1667	7,2	T 50 B	10
63	44266	9	1111	10,8	T 50 B	10
63	44267	12	833	14,4	T 50 B	10
63	44268	15	667	18,1	T 50 B	10
63	44269	18	556	21,6	T 50 B	10
63	44270	24	417	28,9	T 50 B	10
63	44271	2 x 6	2 x 833	2 x 7,2	T 50 B	10
63	44272	2 x 9	2 x 556	2 x 10,8	T 50 B	10
63	44273	2 x 12	2 x 417	2 x 14,4	T 50 B	10
63	44274	2 x 15	2 x 333	2 x 18,1	T 50 B	10
63	44275	2 x 18	2 x 278	2 x 21,6	T 50 B	10
63	44276*	2 x 24	2 x 208	2 x 28,9	T 50 B	10


* **to be noted** : marked transformers are non-approved.
 Protection transformers according to EN 60742 circuit isolation transformer.

- Vacuum filling
- Two compartments bobbins
- Self-extinguishing plastics UL 94 VO
- Degree of protection IP 00
- 300 grams weight
- Resin class B CEI 85 (20 000 h testing to CEI 126)
- Fuse protection on primary side to be assumed by customer
- 30 V and 36 V models are VDE EN 60742 certified (production on request)
- Insulation voltage 4 KV (6 KV MYRRA test)
- 100% tested production
- Certification : CCA procedure on request

OPTIONS :


Boxes with fixing support

2 Secondary windings
7 8 11 12




Primary winding
6 1


1 Secondary winding
7 8 11 12




Primary winding
6 1



Recommended layout for transformers
with 1 secondary winding
(Allows the use of a transformer with
2 secondary winding)

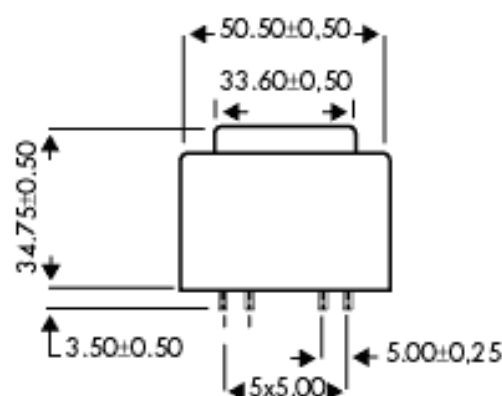

** RECOMMENDED DRILL-HOLE
DIAMETER FOR 1,3 mm PINS

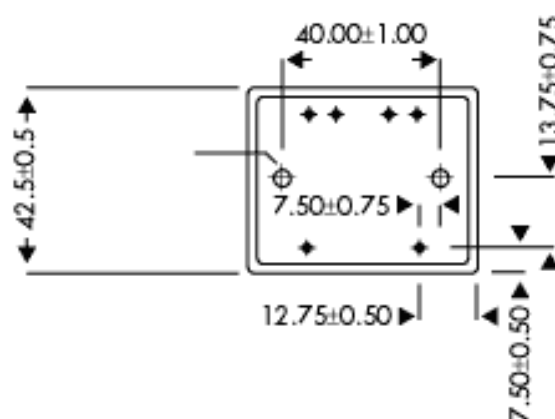

** RECOMMENDED DRILL-HOLE
DIAMETER FOR MOUNTINGS = 4mm