
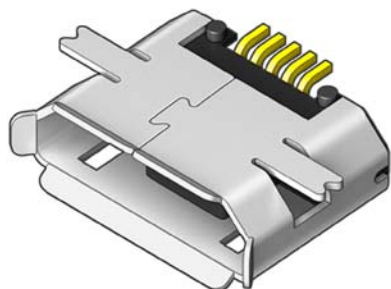
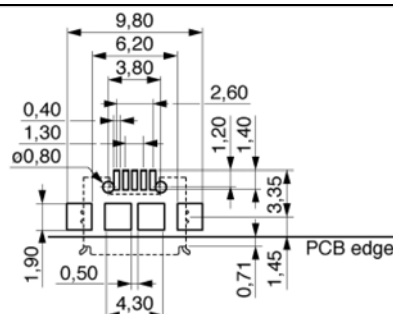


Order code: 712-1-S-BS0**13) USB****Series:****712**

Board termination	 SMD gull wing
Orientation to PCB	 Parallel
No of contacts	5
Material contact	Phosphor bronze
Plating contact	Selective Au
Material insulator	High temp. thermoplast UL94V-0
Rated current	1,0 A for pin 1 to 5 or 1,8 A for pin 1 and 5 and 0,5 A for pin 2 to 4
Rated voltage	30 V _{RMS} / V _{DC}
Withstand voltage	100 V _{RMS} for 1 minute
Operating temperature	-30°C to +80°C
Max. processing temper.	260°C for 10 seconds
Packaging	Standard

Micro USB
Type B for SMD mount.



Date: 03.01.2015

Order code:

712-1-S-BS0

MPE Garry GmbH

Phone: +49 (0) 83 62 / 91 56-0