

DI gG 4A/500V



Specifications

ETI Code	002311402
Description	DI gG 4A/500V
Weight	12
Level	Fuse links gG
Product group	D Low voltage Fuses
Characteristics	gL/gG (cable protection/equipment protection)
Rated AC voltage (V)	500
Rated current (A)	4
Type	D
Size	DI
Breaking capacity AC (kA)	50
Breaking capacity DC (kA)	8
Rated DC voltage (V)	250
Dimensions	E16
Indicator	visual top

Online product page 

Other documentation



CE declaration


Technical data catalogue




ETIM international clasification

Nominal rated current	4A
Nominal rated voltage	500V
Release characteristic	Time-lag
Colour code	Brown
Construction size	DI
Utilization category	gL/gG (cable protection/equipment protection)


Cut-off current characteristics

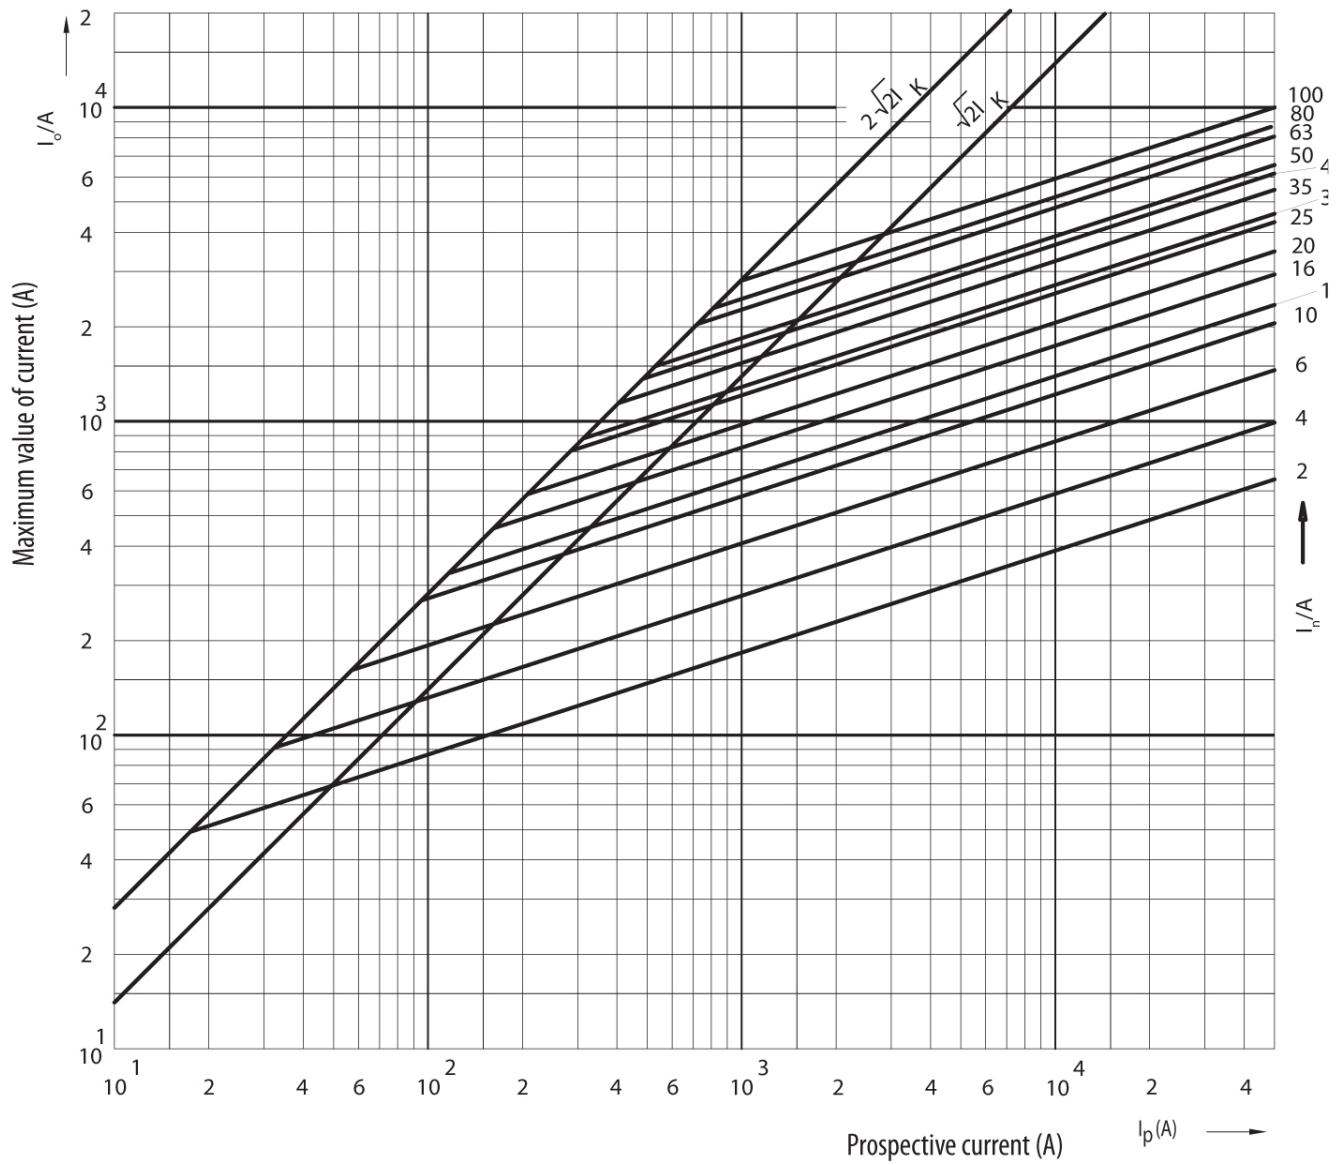


Melting energy characteristics

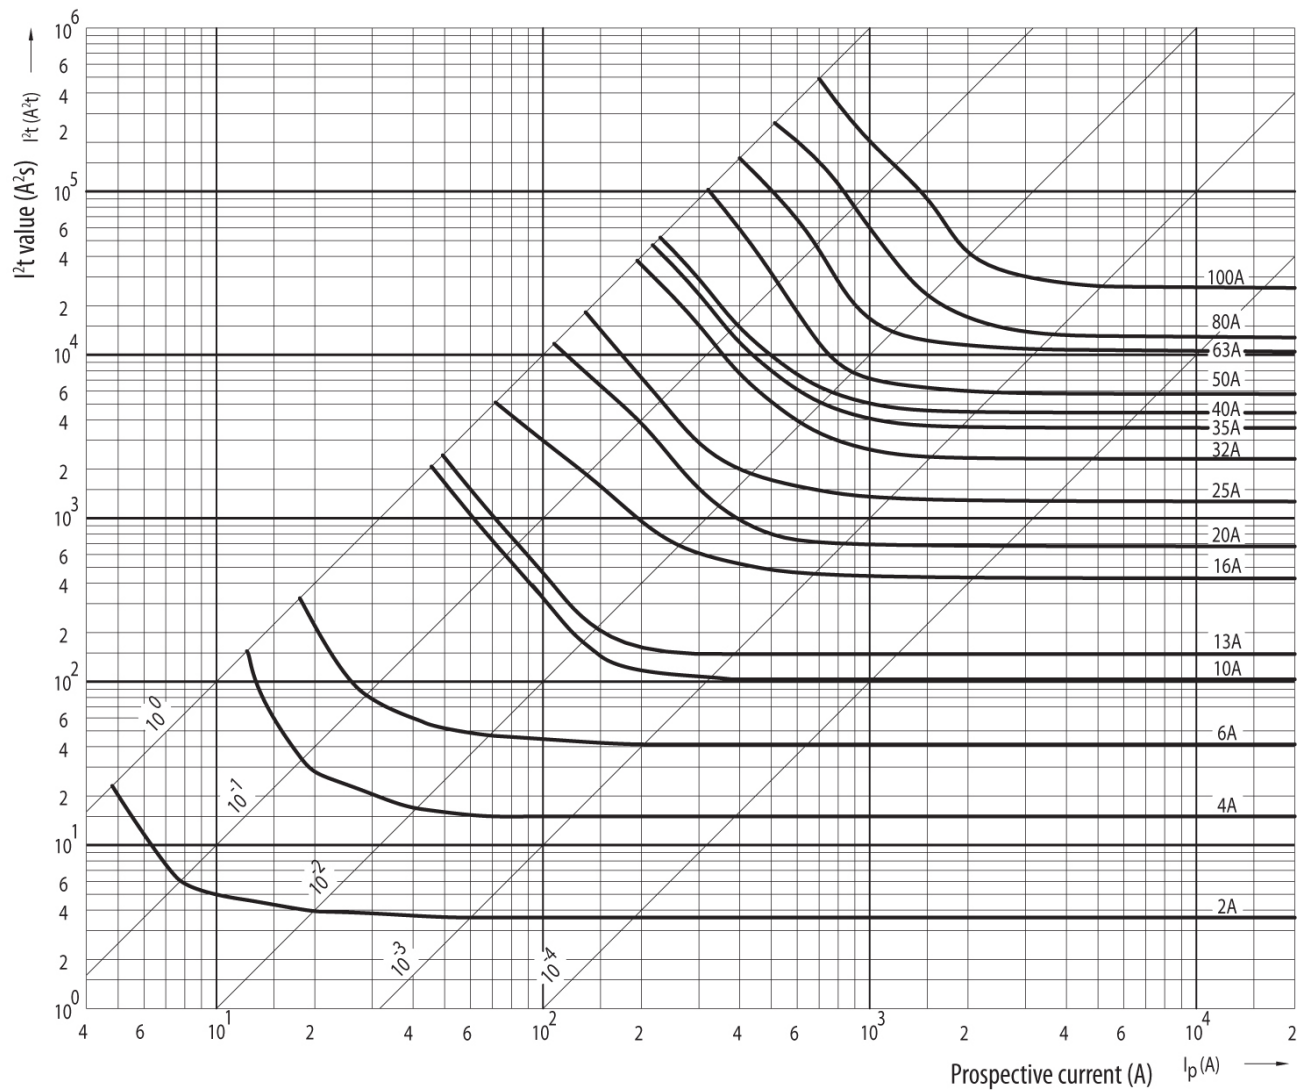

Time current characteristics

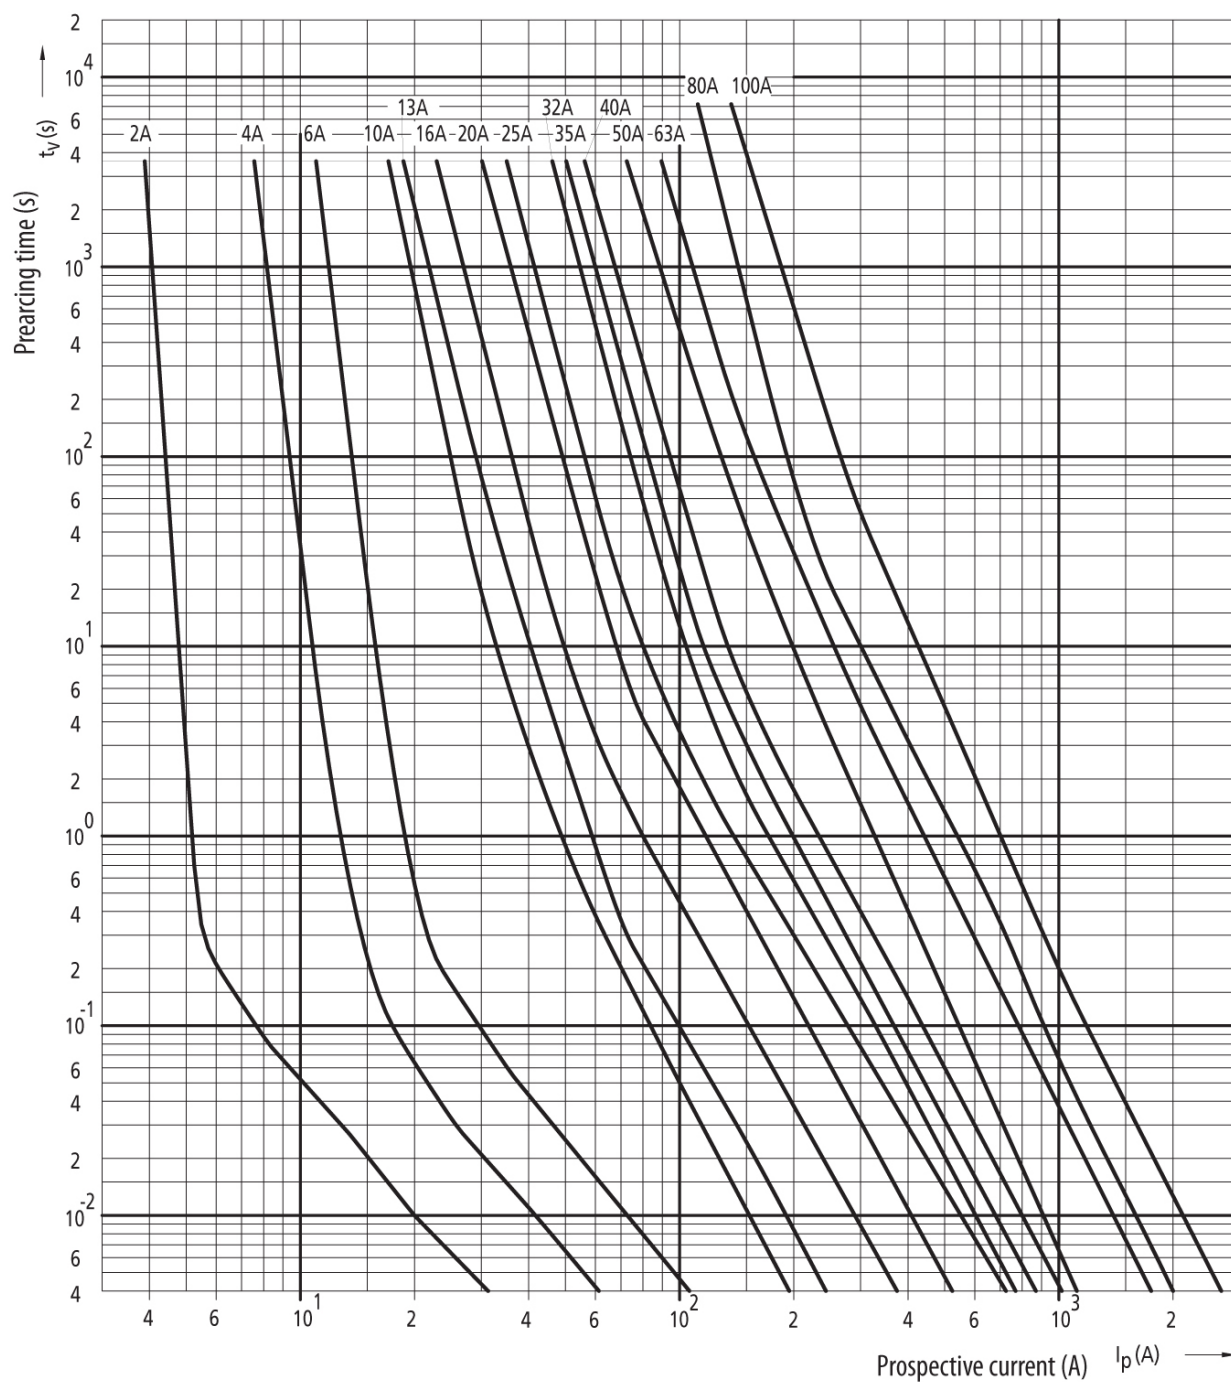

Dimension drawing

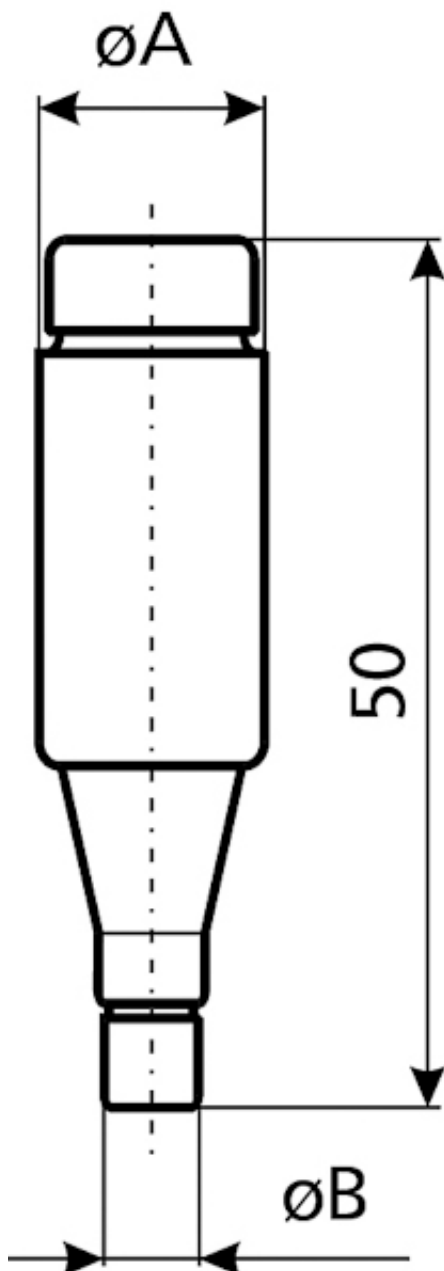

[A]	$\varnothing A$	$\varnothing B$
2	13,2	6
4	13,2	6
6	13,2	6
10	13,2	8
16	13,2	10
20	13,2	12
25	13,2	14