




项 目 Item	参 数 Parameter
额定电流、电压 Rated voltage Rated current	6A 250V AC 10A 125V AC 10(6)A 250V AC
绝缘电阻 Insulated resistance	$\geq 100\text{M } \Omega$
接触电阻 Contact resistance	$\leq 50\text{m } \Omega$
介电强度(极间) Dielectric strength	1500VAC/5S
电器寿命 Endurance	≥ 50000 Cycles
使用温度 Ambient temperature	T 85/55
防护级别 Degree of protection	IP 55

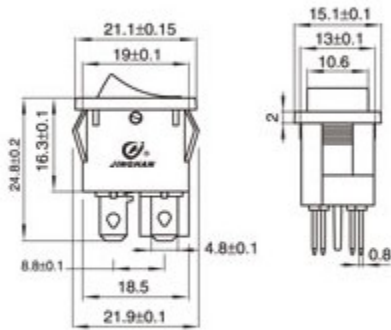



面板厚度 Panel thickness	$X^{+0.10}_0$	$Y^{+0.10}_0$
0.6-1.2	19	13
1.2-2	19.2	
2-3	19.4	

ORDER INFORMATION 订货标识

KCD1-1 04 K 4P A 1 K

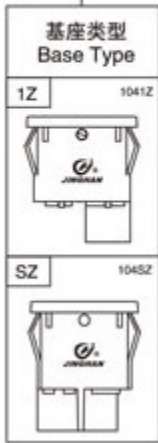

基座颜色 Body Color	
K	Black
W	White
Y	Yellow
R	Red
G	Green
O	Orange
B	Blue



开关标记 Making	
0	空白 No Making
1	O —
2	●
3	米 井
4	O I
5	OFF ON
6	客人要求

按钮颜色 Rocker Color	
K	Black
W	White
Y	Yellow
R	Red
G	Green
O	Orange
B	Blue