


项目 Item	参数 Parameter
额定电流、电压 Rated voltage Rated current	6A 250V AC 6(4)A 250V AC 10A 125V AC 12(6)A 125V AC 10(6)A 250V AC 12GP 125V AC
绝缘电阻 Insulated resistance	$\geq 100\text{M } \Omega$
接触电阻 Contact resistance	$\leq 50\text{m } \Omega$
介电强度(极间) Dielectric strength	1500VAC/5S
电器寿命 Endurance	≥ 50000 Cycles
使用温度 Ambient temperature	T 105/55
防护级别 Degree of protection	IP 55

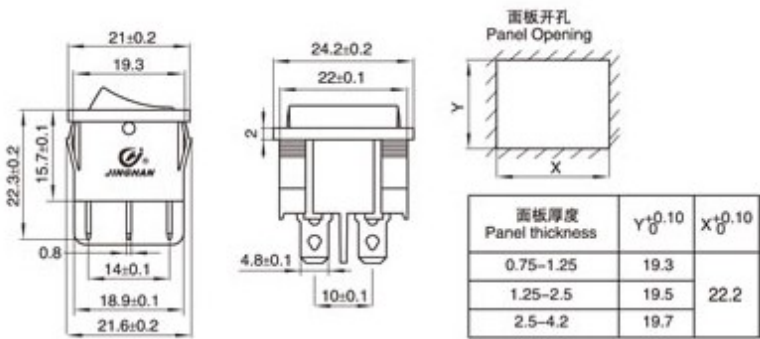

ORDER INFORMATION 订货标识

KCD2- 501 K 4P A 1 K

Base Type: 501B, 501A

Base Color: K (Black), W (White), Y (Yellow), R (Red), G (Green), O (Orange), B (Blue)

Circuit Diagram: 4P ON-OFF, 4PN ON-OFF, 4PV (ON)-OFF, 6P ON-ON, 6PN ON-ON, DV (ON)-OFF-ON, D ON-OFF-ON

Terminal: A (4.8 x 0.8), B (3.2 x 0.8)

Switch Marking: 0 (Blank), 1 (O), 2 (.), 3 (H), 4 (O), 5 (H), 6 (Customer Requirement)

Rocker Color: K (Black), W (White), Y (Yellow), R (Red), G (Green), O (Orange), B (Blue)