


| 项 目 Item                                  | 参 数 Parameter                                                              |
|-------------------------------------------|----------------------------------------------------------------------------|
| 额定电流、电压<br>Rated voltage<br>Rated current | 16A 250V AC 20(12)A 125V AC<br>20A 125V AC 20GP 125V AC<br>16(10)A 250V AC |
| 绝缘电阻<br>Insulated resistance              | $\geq 100M \Omega$                                                         |
| 接触电阻<br>Contact resistance                | $\leq 50m \Omega$                                                          |
| 介电强度(极间)<br>Dielectric strength           | 1500VAC/5S                                                                 |
| 电器寿命<br>Endurance                         | $\geq 50000$ Cycles                                                        |
| 使用温度<br>Ambient temperature               | T 105/55                                                                   |
| 防护级别<br>Degree of protection              | IP 67                                                                      |

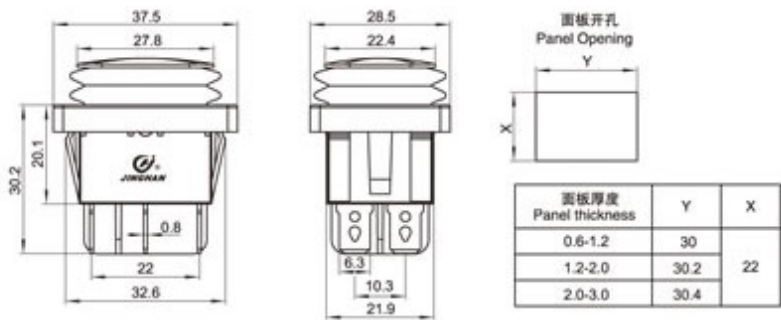

ORDER INFORMATION 订货标识

KCD4-

130FS

K

4P

A

1

K

基座类型  
Base Type

01 130FS

基座颜色  
Body Color

|   |  |
|---|--|
| K |  |
| W |  |
| Y |  |
| R |  |
| G |  |
| O |  |
| B |  |

电路图  
Circuit Diagram

4P

4PV

4PN

6PN

D

DW

端子规格  
Terminal

A

开关标记  
Making

|   |                 |    |       |
|---|-----------------|----|-------|
| 0 | 空白<br>No Making | 8  | 米 升   |
| 1 |                 | 9  | 前进 后退 |
| 2 |                 | 10 | 开启 关闭 |
| 3 |                 | 11 | 快速 慢速 |
| 4 |                 | 12 |       |
| 5 | 手动 自动           | 13 |       |
| 6 | OFF ON          | 14 |       |
| 7 |                 | 15 |       |
|   |                 | 16 | 客人要求  |

按钮颜色  
Rocker Color

|   |  |
|---|--|
| K |  |
| W |  |
| Y |  |
| R |  |
| G |  |
| O |  |
| B |  |